

River Basin Management Plans (2015 - 2021)

Groundwater Classification Methodology

Drinking Water Protected Area

December 2015

Groundwater Classification Methodology

Drinking Water Protected Area

September 2015

Introduction

All groundwater bodies in Northern Ireland were classified in 2014-2015 to establish whether they are at good or poor status utilising monitoring data from the past six years (2009 to 2014). Status is divided in to qualitative and quantitative status and a number of tests were carried out for each, see Figure 1.

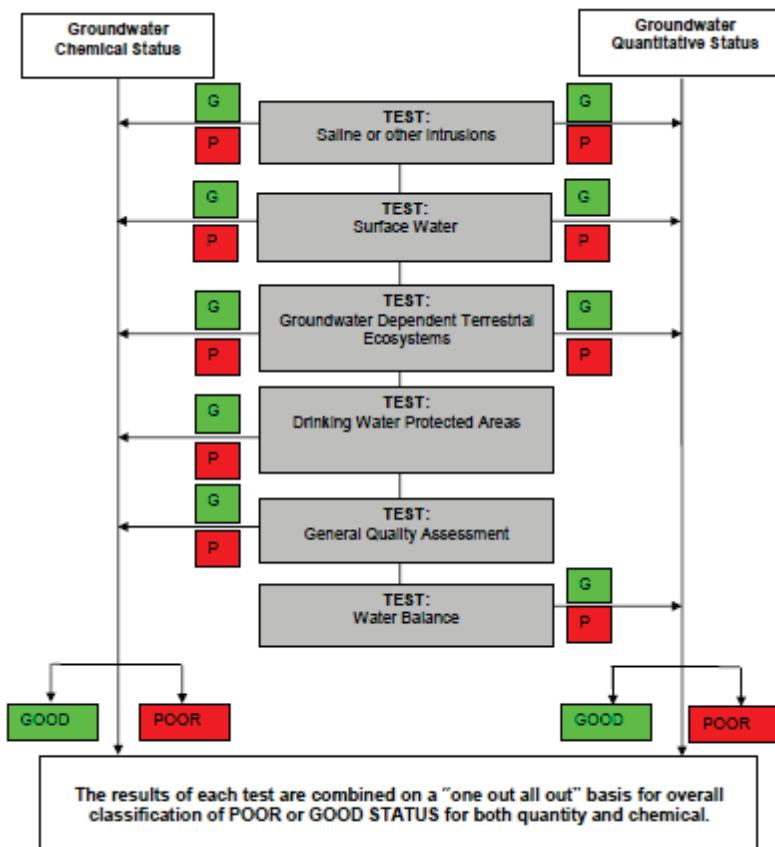


Figure 1: Overview of classification tests [from UK Technical Advisory Group paper 11b(i)].


Drinking Water Protected Area classification

The DWPA test determines whether significant potable sources are being unacceptably impacted by groundwater pollution and is one of the five tests developed for groundwater body chemical classification based on WFD requirements and guidance provided at an EC and UK level. (UKTAG, 2012a). The test comprises two basic elements, firstly an assessment of whether existing untreated water quality exceeds a threshold and secondly whether there is a deterioration (increasing trend) that could result in the need for new or additional purification treatment.

All groundwater bodies except one (Neagh) are defined as drinking water protected areas.

The method for DWPA classification is given below and was derived from the UKTAG guidance for chemical classification, updated for the 2nd RBP cycle (UKTAG, 2012a).



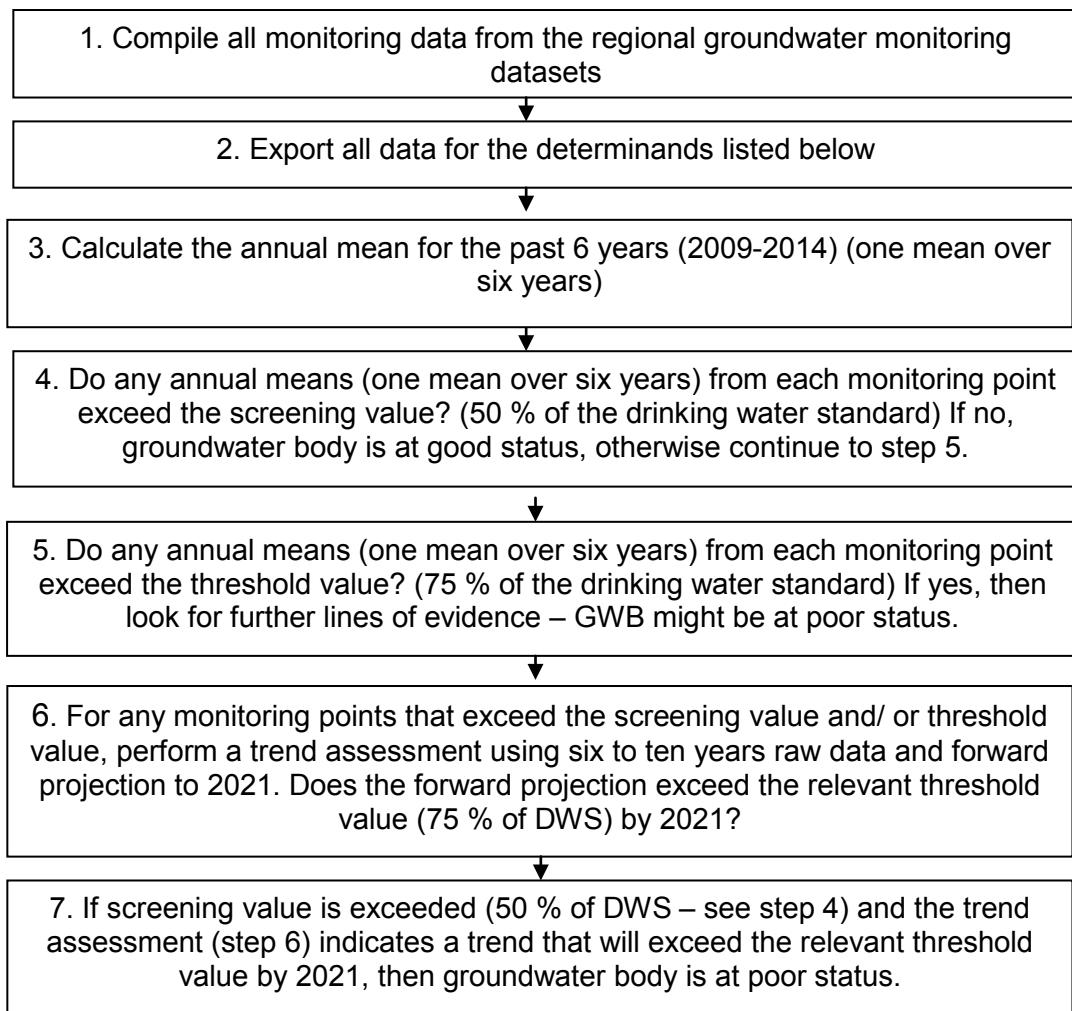

Monitoring Data

Groundwater quality in Northern Ireland is measured through the collection of water samples from boreholes and springs that are mostly owned and operated by third parties. Hence NIEA rely on the co-operation of land/ property owners to continue sampling from their groundwater sources for the chemical monitoring. This means that the network can change due to businesses closing or changing their groundwater usage and datasets for trend assessments are often small. The network consists mainly of industrial boreholes where groundwater is utilised for manufacturing or food/ drinks production. A small number of springs or boreholes purpose-installed by NIEA, which are purged prior to sampling, are also monitored. Regional monitoring of groundwater across Northern Ireland began in 2000. The location of the stations can be viewed on the River Basin Plan Map Viewer. The monitoring frequency and selection of determinants follows [UKTAG guidance](#).

Threshold Values

New threshold values for classification were introduced by UK Technical Advisory Group who [consulted](#) on them in 2012. Threshold values used for classification can also be found in the [Groundwater \(Amendment\) Regulations \(Northern Ireland\) 2014](#).

The determinands for which this assessment is to be applied are:

Determinand	DWS	TV	screening value (50 % of DWS)
Aluminium µg/l	200	150	100
Arsenic µg/l	10	7.5	5
Atrazine µg/l	0.1	0.075	0.05
Cadmium µg/l	5	3.75	2.5
Chloride mg/l	250	187.5 ¹	125
Lead µg/l	25	18.8	12
MCPA µg/l	0.1	0.075	0.05
MCPP (Mecoprop) µg/l	0.1	0.075	0.05
Mercury µg/l	1.0	0.75	0.5
Nitrate mg/l NO ₃	50	37.5	25
Polycyclic aromatic hydrocarbons µg/l	0.1	0.075	0.05
Simazine µg/l	0.1	0.075	0.05
Sulphate mg/l	250	187.5	125
Tetrachloroethene µg/l	10	7.5	5
Trichloroethene µg/l	10	7.5	5
total pesticides	<input type="checkbox"/>	0.5	0.25

As recommended by the UKTAG (2012b), screening values (risk assessment concentrations) should be 50 % of the relevant DWS. This is so that there is ample time to take action to prevent a future exceedance of the threshold value which would require further investigation.

Trend Assessment

Identifying significant and sustained upward trends of certain parameters is important for ensuring that objective IV of the WFD is met. An upward trend is indicative of an anthropogenic pressure on a groundwater body. Analysing monitoring data for a significant and sustained upward trend is therefore important.

The Northern Ireland Environment Agency commissioned the British Geological Survey to review methods of trend assessment applicable to small datasets. The recommendation made by the review was to combine several methods like Sen and Man-Kendall to increase confidence in the trend assessment. The trend assessment has been carried out using the inbuilt function of the AquaChem software package. This was designed by Schlumberger Water Services in conjunction with the Environment Agency of England specifically to assess trends within groundwater monitoring data collected for the purposes of WFD

¹ Note: a separate threshold value applies for the saline intrusion test.

classification and characterisation. The software also includes a forward projection capability to predict concentration levels for the next river basin planning cycle.

Further information on the trend assessment method can be found in Stuart (2012)

References

Council Directive (EC) 2006/118/EC of 12 December 2006 on the protection of groundwater against pollution and deterioration

CIS Guidance 15 (2007). *Guidance on Groundwater Monitoring*.
http://ec.europa.eu/environment/water/water-framework/objectives/implementation_en.htm

Northern Ireland Environment Agency (2009) *Threshold Values for Assessing Groundwater Chemical Status*.
<http://www.doeni.gov.uk/niea/thresholdvaluesforassessinggroundwaterchemicalstatus-july2009.pdf>

Stuart, M.E. (2012). *Trend analysis and prediction for small groundwater quality datasets from Northern Ireland*. British Geological Survey Commissioned Report, CR/12/037. 38pp

UKTAG Paper 12(a), (2007). *Guidance on Monitoring Groundwater*. www.wfd.uk.org

UKTAG Paper 11b(i), (2012a). *Groundwater Chemical Classification for the purposes of the Water Framework Directive and the Groundwater Directive*. www.wfd.uk.org

UKTAG Paper (2012b). *Characterisation of Risks to Groundwaters for the 2nd River Basin Cycle*. www.wfd.uk.org